

# APX NEXT XN

ALL-BAND P25 SMART RADIO



## OUTPERFORM THE UNEXPECTED

### OPERATE IN UNCHARTED EXTREMES.

You've seen tough, but not like this. APX NEXT XN takes toughness to a new level, built to the latest fire standards. Newly added software features enhance fireground safety and post incident review. Ruggedness and safety is bolstered with our leading APX audio in both the radio and XVN500 RSM, for the most intelligible audio in any environment. And when you need to go beyond voice, you are ultra connected with LTE, GPS, Wi-Fi and Bluetooth.

### EFFORTLESS USABILITY AND VERSATILITY.

APX NEXT XN is designed for effortless usability in day-to-day operations and when everything is on the line. Oversized intuitive controls are glovable and minimized from accidental activations. When you need more data, the mission-critical touchscreen works in rain, heat, dust and dirt. ViQi understands a range of commands, so you can operate your radio with eyes-up awareness. Every interaction is simple, fast and logical. You stay focused on what matters—your call, your crew, and your safety.

### EXPANDABLE INTELLIGENCE FOR TODAY AND BEYOND.

The nature of the incidents you call on can change rapidly, just like your needs for new technology. APX NEXT XN offers a secure extensible platform for new capabilities to be added as your needs evolve. Smart applications keep you connected when you go beyond system coverage and put intelligence into your hands with vital information, from location details to sharing important multimedia for enhanced collaboration with your crew. Because when you need information, you need it fast.

### PROVISION AND OPTIMIZE FLEET MANAGEMENT.

Behind each of your firefighters stands a team—from technicians to IT staff to network engineers—working to keep them safe. APX NEXT XN gives you back time. With our RadioCentral suite you can keep radios in the field with remote updates and get insights to fleet optimization with radio analytics. A range of device services help manage your operations and help achieve performance targets. With APX NEXT XN, your ownership experience is streamlined, and your firefighters stay focused and ready.





# MISSION-CRITICAL DESIGN

V/U/7/800

Exaggerated hard controls, protected against accidental activation

Performance antennas improve comfort and wearability

Large emergency button

Large color top screen displays critical information at a glance

High Dynamic Range microphones, for outstanding audio capture

Large PTT button


3 programmable side buttons

Mission-critical touchscreen: rugged, usable with gloves, readable in all lighting conditions

UL Division 2 Standard  
3400 mAh battery

Large ViQi button

Oversized display sleep/wake and home button

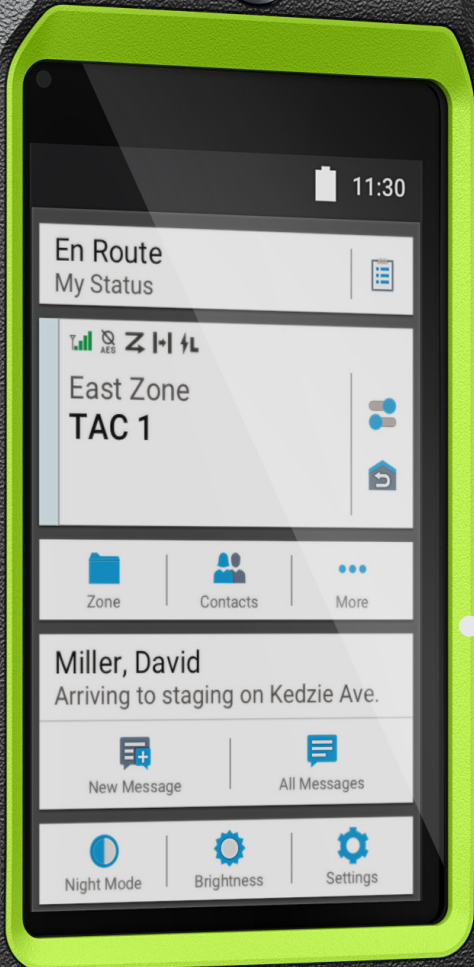



# FEATURES

## OPERATION MODES

Digital Trunking: 9600 Baud APCO P25 phase 1 FDMA and phase 2 TDMA

Digital Conventional: APCO 25

Analog Trunking: 3600 Baud SmartNet®, SmartZone®, Omnilink®

Analog Trunking: MDC 1200

ASTRO® 25 Integrated Voice and Data

SmartConnect Multi-net Connectivity\*

## FREQUENCY BANDS

Available in Multi-Band and Single-Band Configurations

All-band: Operation in VHF, UHF Range 1, UHF Range 2, 700 and 800 MHz Bands

Up to 3000 Channels

Up to 125 Zones

## ADDITIONAL CONNECTIVITY

Bluetooth (Version 5.0)

Wi-Fi (802.11b/g/n/ac), 2.4 and 5 GHz Bands

LTE (FirstNet®, Verizon and Bell Mobility-certified)

NFC (Near-Field Communications)\*\*

## AUDIO FEATURES

3 W Speaker with Adaptive Equalization

2 Internal HDR Microphones

Adaptive Dual-sided Operation

Adaptive Noise Suppression Intensity

Adaptive Gain Control

Adaptive Windporting

IMPRES™ Audio Accessory Compatibility

## MANAGEMENT

RadioCentral™

SmartProgramming\*

SmartInsight\* Preview

## LOCATION-TRACKING

Built-in GNSS (GPS, A-GPS, GLONASS)

SmartLocate and Indoor Positioning\*

Mission-critical Geofence\*\*

SmartMapping\*

## SECURITY

256-bit AES\*

Single-key ADP Encryption\*

Software Key

P25 Authentication\*

Multikey for 128 Keys and Multi-algorithm\*

Over-The-Air Keyloading\*\*\*

Over-The-Air Rekeying (OTAR)\*

## INGRESS PROTECTION

IEC 60529 - IP68 (2 m, 4 hrs)

MIL-STD Delta-T, 512.X Procedure 1

Hazard Zone Heat and Immersion Leakage Resistance\*\*\*\*

## MESSAGING

Text Messaging\*

SmartMessaging\*

## HAZLOC / HAZARD ZONE

Class I, Division 2, Groups A, B, C, D

Class II, Division 2, Groups F, G

Class III, Hazardous Locations

Hazard Zone Design\*\*\*\*

## USER INTERFACE

3.6" Mission-critical Touchscreen: 800x480 TFT 24-bit Full

Color Transflective Display, 1 mm Toughened Glass Lens

Capacitive Touch Technology: Usable with Gloves

Up to 4 mm Thick, Resistant to False Actuation from Fresh or Salt Water, Snow, Ice, Dirt or Grease

High Velocity User Interface: Large Touch Targets, Shallow Menu Hierarchy, Home Screen Information at a Glance, Integrated Applications

1.2" Top Display: 200x112 TFT 18-bit Color Transflective Screen, 1 Line of Icons, 2 Lines of Text, 14 Characters per Line, 2 mm Toughened Glass Lens

PTT Button: 1.50 x 0.67 in (38 x 17 mm)

Large 16-position Channel Selector

Large Angled Power/Volume Knob

Large Orange Emergency Button

3 Programmable Side Buttons (1-dot, 2-dot, purple)

Concentric 2-position Switch

ABC Zone Switch

ViQi Button (3-dot)

Display On/Off/Home Button

## VIQI VOICE INTERACTION

Customizable Voice Announcements

Voice Control: Radio Operation with Intuitive Commands\*

Virtual Partner Service\*

## ENERGY

Standard 3400 mAh UL Div 2 Battery

IMPRES 2 Smart Battery Technology

## SENSORS

Ambient Light

Accelerometer x2 (Display Orientation, Man Down)

Magnetometer (eCompass)

Barometer\*\*

## OTHER FEATURES

Radio Profiles

Data logging & Self-checks

Hazard Zone Mode

Enhanced Data\*

Multicast Voting Scan\*

Man Down/Fall Alert\*

DVRS PSU\*

Digital Tone Signaling\*

APX Personnel Accountability\*

## DIMENSIONS

Radio with Standard Battery, no Antenna

Height: 7 in (178 mm)

Width: 2.5 in (63 mm)

Depth: 2.1 in (54 mm)

Weight: 24 oz (680 g)

\*Optional Feature

\*\*Hardware-ready

\*\*\*Included with OTAR

\*\*\*\*Designed to meet the 2021 performance standards for operation in the hazard zone, as outlined on page 6

14.9 in  
(378 mm)

8.2 in  
(210 mm)

7 in  
(178 mm)

2.5 in  
(63 mm)

2.1 in  
(53 mm)

3.5 in  
(89 mm)



# PERFORMANCE

## TRANSMITTER

	Footnote	VHF	UHF Range 1	UHF Range 2	700 MHz	800 MHz
Frequency Range / Bandsplits	-	136-174 MHz	380-470 MHz	450-520 MHz	762-776, 792-806 MHz	806-825, 851-870 MHz
Channel Spacing	1	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz
Maximum Frequency Separation	-	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Rated RF Output Power (Adjustable)	2	1-6 W	1-5 W	1-5 W	1-2.5 W	1-3 W
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	2	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm
Modulation Limiting (12.5 / 20 / 25 kHz Channel)	2	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz
Emissions (Conducted and Radiated)	2	-75 dBc	-75 dBc	-75 dBc	-75 dBc	-75 dBc
Audio Response	2	+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB	+1, -3 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	2	-53 / -55 dB	-52 / -54 dB	-51 / -54 dB	-50 / -55 dB	-49 / -53 dB
Audio Distortion (12.5 / 25 kHz Channel)	2	0.9% / 0.9%	0.9% / 0.9%	0.9% / 0.9%	0.9% / 0.9%	0.9% / 0.9%

## RECEIVER

	Footnote	VHF	UHF Range 1	UHF Range 2	700 MHz	800 MHz
Frequency Range / Bandsplits	-	136-174 MHz	380-470 MHz	450-520 MHz	762-776, 799-806 MHz	851-870 MHz
Channel Spacing	1	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz
Maximum Frequency Separation	-	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit	Full Bandsplit
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	2	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm	±1.0 ppm
Analog Sensitivity (12 dB SINAD)	2	0.178 µV (-122.0 dBm)	0.211 µV (-120.5 dBm)	0.211 µV (-120.5 dBm)	0.224 µV (-120.0 dBm)	0.237 µV (-119.5 dBm)
Digital Sensitivity (1% BER)	3	0.266 µV (-118.5 dBm)	0.298 µV (-117.5 dBm)	0.298 µV (-117.5 dBm)	0.335 µV (-116.5 dBm)	0.335 µV (-116.5 dBm)
Digital Sensitivity (5% BER)	3	0.158 µV (-123.0 dBm)	0.178 µV (-122.0 dBm)	0.178 µV (-122.0 dBm)	0.224 µV (-120.0 dBm)	0.224 µV (-120.0 dBm)
Selectivity (12.5 / 25 kHz Channel)	2	77 / 84 dB	74 / 81 dB	74 / 81 dB	72 / 80 dB	72 / 79 dB
Intermodulation Rejection	2	82 dB	80 dB	80 dB	80 dB	80 dB
Spurious Rejection	2	98 dB	95 dB	95 dB	98 dB	98 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	2	55 / 59 dB	54 / 58 dB	54 / 58 dB	53 / 57 dB	52 / 56 dB
Audio Distortion	2	0.90%	0.90%	0.90%	0.90%	0.90%





## IMPRES™ 2 BATTERIES

	Footnote	Part No	Capacity	Availability
Standard HazLoc	4	PMNN4812	3400	Included

## ENCRYPTION

Supported Encryption Algorithms	ADP, AES, DES, DES-XL, DES-OFB, DVP-XL, Localized Algorithm
Encryption Algorithm Capacity	8
Encryption Keys per Radio	1024 Keys, Programmable for 128 Common Key References (CKR) or 16 Physical Identifiers (PID)
Encryption Keying	Local Key Loader and Over-the-Air Rekeying (OTAR)
Synchronization	XL - Counter Addressing; OFB - Output Feedback
Vector Generator	NIST-Approved Random Number Generator
Encryption Type	Digital and SecureNet, TLS1.2, SRTP
Key Storage	Tamper-protected Volatile or Non-volatile Memory
Key Erasure	Keyboard Command and Tamper Detection
Standards	FIPS 140-2 Level 1 and Level 3, FIPS 197
Device Certificates	x.509v3 ECC-P384, x.509v3 RSA-2048
Cipher Suites	ECDHE_ECDSA_WITH_AES256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA TLS_RSA_WITH_AES_256_GCM_SHA384 SRTP_AEAD_AES_256_GCM1

## LOCATION-TRACKING

Constellations	GPS, A-GPS, GLONASS	-
Tracking Sensitivity	-159 dBm	-
Accuracy	<5m (95%)	See footnote 5
Cold Start	<60 Seconds (95%)	See footnote 5
Hot Start	<5 Seconds (95%)	See footnote 5
Mode	Autonomous (Assisted Only)	-

## WIRELESS

LTE	
Bands Supported	2, 4, 12, 13, 14
Bands (Hardware Ready)	5, 17
Device Category	4
Certifications	FirstNet®, Verizon®, Bell Mobility
Wi-Fi	
Standards Supported	802.11a/b/g/n/ac
Frequency Range	2400-2472, 5180-5825 MHz
Security	Supports WPA-2, WPA, WEP
Capacity	Up to 20 SSIDs
Bluetooth	
Version	5.0
Frequency Range	2402 - 2480 MHz
Security	128-bit AES-CCM Encryption

## AUDIO

Audio Output Power at Rated	3 W
Audio Output Power at Max	5 W
Audio Response (EIA)	+1, -3 dB
Speech Loudness at 12 in (300 mm)	105 Phon
Audio Features	Adaptive Equalization Adaptive Dual-sided Operation Adaptive Noise Suppression Intensity Adaptive Gain Control Adaptive Windporting IMPRES Audio



# ENVIRONMENTAL AND REGULATORY

## MIL-STD

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G/H	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1, C3	503.3	I/A1, C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II/Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	1 Proc	1 Proc	510.2	II	510.3	II	510.4	II	510.5	II
Submersion	512.1	I	512.2	I	512.3	I	512.4	I	512.5	I
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI
Shock (Drop)	516.2	II	516.3	IV	516.4	IV	516.5	IV	516.6	IV

## HAZARD ZONE

	METHOD
Audio Speech Quality	Perceptual Objective Listening Quality Analysis performed and pass after all testing listed below
Heat and Immersion Leakage Resistance	350°F (177°C) for 15 minutes, water immersion 4.9ft (1.5m) for 15 minutes. Repeated 6 times
Vibration Resistance	Vibrated for 3 hours, 1" (25mm) orbital path at 250rpm
Impact Acceleration	9.8 ft (3 m) dropped 8 times
Corrosion	48 hour salt spray, 48 hour 50% humidity chamber
Display Surface Abrasion	2.2lb (1kg) load, for 200 cycles
High Temperature Functionality	500°F (260°C) for 5 minutes
Heat and Flame	203°F (95°C) for 15 minutes, 10 seconds 950°C (1742°F) direct flame
Product Label Durability	Label examination post heat and immersion test, corrosion test, high temperature test
Cable Pull-out	35 lbf (156 N) force
Case Integrity	442 lb (200 kg) compression load, 1 minute, all 4 faces
Water Drainage	Water is introduced into all openings, indentations, and grills until water overflows, without audio degradation
Tumble	3hrs, 15 RPM, Tumble Test in 46" Metal Drum. (2,700 total rotations)
TIA Transmit Power	Devices tested for carrier output and RF power output
TIA Carrier Frequency Stability	Devices tested for frequency stability and operating frequency accuracy
TIA Receiver Sensitivity	Devices tested for analog and digital reference sensitivity
Power Source Performance	Devices continuously operated for at least 8 hours on standard duty cycle 10-10-80 at max rated transmit power
Electronic Temperature Stress	Devices are operated after temperature exposure of -4°F (-20°C) for 4-hours, and +160°F (+71°C) for 4-hours
Antenna VSWR Swept Frequency	Antenna performance must be maintained after Drop/Impact, Tumble and Corrosion tests

## ENVIRONMENTAL

Operating Temperature	-30 to +60 °C (-22 to +140 °F)	See footnote 6
Storage Temperature	-40 to +85 °C (-40 to +185 °F)	See footnote 6
Humidity	Per MIL-STD 810	-
ESD	IEC 801 - 2 kV	-
Dust Resistance	IP6X	-
Water Resistance (Submersion)	IPX8 (2 meters, 4 hours) MIL-STD Delta-T, 512.X Procedure 1	-

## REGULATORY

FCC ID	AZ489FT7119
IC ID	109U-89FT7119
LMR	8K10F1D, 8K10F1E, 8K10F1W, 11K0F3E, 16K0F3E, 20K0F1E
Bluetooth	1M18G1D, 1M1F1D, 2M1F1D
Wi-Fi	12M9G1D, 16M7D1D, 17M9D1D, 36M2D1D, 17M5D1D, 18M4D1D, 36M8D1D, 76M1D1D
LTE	Band 2 (1850.7 - 1900 MHz), Modulation: *G7D, *D7W Band 4 (1710.7 - 1745 MHz), Modulation: *G7D, *D7W Band 12 (699.7 - 711 MHz), Modulation: *G7D, *D7W Band 13 (777 - 787 MHz), Modulation: *G7D, *D7W Band 14 (790.5 - 793 MHz), Modulation: *G7D, *D7W
All-band Model Number	H55TGU9PW8AN
Single-band Model Number	H45TGU9PW8AN

### FOOTNOTES:

- Please refer to local regulations for available channel bandwidths.
- Measured conductively in analog mode per TIA / EIA 603 under nominal conditions, and at 1 W Rated Audio for Rx. Selectivity measured using the TIA-603 single-tone method.
- Measured conductively in digital mode per TIA / EIA IS 102.
- Listed by UL to non-incendive standards: UL 121201 and CAN/CSA C22.2 No. 213-17 as safe for use in Class I, Division 2, Groups A,B,C,D; Class II, Division 2, Groups F,G; Class III Hazardous Locations.
- Measured conductively with >6 satellites visible at a nominal -130 dBm signal strength. Specs provided are 95th percentile values.
- Temperatures listed are for radio specifications with LMR only. Front display, LTE, Wi-Fi, Bluetooth and GPS not available when radio internal temperature is below -20 °C (-4 °F). Batteries should be charged at 0 to +45 °C (+32 to +113 °F) and stored at +20 to +25 °C (+68 to +77 °F). Reference [motorolasolutions.com/batterycaare](https://motorolasolutions.com/batterycaare)

All specifications are subject to change without notice. For full details consult product service manual, document no. MN005643A01.



# ACCESSORIES

EXPAND AND CUSTOMIZE YOUR RADIO'S FUNCTIONALITY WITH BEST-IN-CLASS ACCESSORIES.

## AUDIO

HEAR AND BE HEARD LIKE NEVER BEFORE



**XVN500 Remote Speaker Microphone**  
PMMN4138

- Loudest, clearest speaker
- Four HDR microphones
- Enhanced windporting
- New adaptive noise suppression
- Dedicated ViQi button
- Designed to the latest standards for the fire service

**12-Pin Interface-to-10-Pin RFDC Adapter**  
PMKN4262

Adapter to be used with 3rd Party Radio Speaker Microphone

## ANTENNAS

DESIGNED FOR WEARABILITY



**Whip All-band Antenna 200 mm**  
(V,U,7/800 MHz)  
AN000417A01

## CARRY

SECURE, EASY ACCESS



**Boston Leather Carry Case**  
PMLN8328

Classic leather ready for extreme environments.



**Fireman's Radio Carry Strap**  
RLN6486

**Fireman's Radio Carry Strap XL**  
RLN6487

**Boston Leather Fireman's Radio Strap**  
AY000223A01

**Boston Leather Fireman's Radio Strap, XL**  
AY000229A01

**Anti-sway Strap**  
RLN6488

## ENERGY

MAXIMIZED POWER, LIFE AND MANAGEMENT



**IMPRES 2 Multi-Unit Charger**  
NNTN9115

**APX NEXT Pocket for**  
**IMPRES 2 Multi-unit Charge**  
NNTN9212

Only for use with NNTN8844



**IMPRES 2 Single-Unit Charger**  
NNTN9199



**IMPRES 2 Standard Capacity Battery**  
PMNN4812  
3400 mAh UL Div 2 (see footnote 4)

For more information, please visit:

[motorolasolutions.com/apxnextxradio](http://motorolasolutions.com/apxnextxradio)



# MANAGED AND SUPPORT SERVICES

## ACHIEVE MISSION CRITICAL PERFORMANCE

Rely on us to help you achieve your performance targets with the right service level you need for systems, devices and applications. Each package provides a higher level of support, transferring the risk and responsibility to Motorola Solutions.

Motorola Solutions provides a range of optional service capabilities, including:

### ACCIDENTAL DAMAGE

Radios are protected from accidental breakage or liquid spills and physical damage. With state-of-the-art diagnostic equipment all of your agency's radio components are protected in the event of an unexpected failure and are back in operation as soon as possible.

### DEVICE PROGRAMMING

We can enable batch programming for APX NEXT XN radios with centralized management to dramatically reduce the time and resources needed to provision and update your radio fleet.

### HARDWARE REPAIR AND SOFTWARE MAINTENANCE

Ensure continuous security, performance and enhanced functionality of your two-way radios by getting access to APX NEXT XN certified and tested release software updates and upgrades and protect your radios from normal wear and tear.

### MYVIEW

A web-based platform that gives you a transparent, single source view of fleet status and service delivery information to help make smarter, faster and more proactive decisions.

### TECHNICAL SUPPORT

Industry certified technical engineers can troubleshoot and provide prompt resolution to any technical issues, whether on-site dispatch or remote.

### ON-SITE SETUP AND DEVICE MANAGEMENT TRAINING

As an add-on service, our technical teams can help you provision and program your fleet of radios on-site and train your staff on the radio fleet commissioning and management.

### PREVENTIVE MAINTENANCE

Our certified technicians conduct annual maintenance checks to help extend the useful life of your radios, reducing repair and replacement costs.



## OUTPERFORM THE UNEXPECTED

For more information, please visit [motorolasolutions.com/apxnextxn](https://motorolasolutions.com/apxnextxn)



# APX NEXT XN

Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. 800-367-2346 [motorolasolutions.com](https://motorolasolutions.com)

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved. 10-2021 [LD05]